

ATTENTION

All moterial quantities and quality should be writted prior to construction by owner and contractor. Contractor to verify all admensions. Contractor shall be responsible for all utility contractors. The prior of t

NOTES:

I. TYPICAL WALL CONSTRUCTION.

EXT. MAGONEY VIDERS, STUCCO OR WOOD/HARDBOARD/VINYL, SIDING ON INSULATING SHEATHING
(R-3) OI, 25 YUDOS & 16" OC. (SEE PLANS) N' BATT INSULATION (R-2)) NITH & MIL. VAPOR
BARKER,
INT. 1(2" SYPSUM BOARD ON 2x4 STUDS & 16" OC. (MNO.) SEE GENERAL NOTE VII.

TYPICAL FLOOR CONSTRUCTION.
 1/2" FINISH FLOOR (OPTIONAL) ON 3/4" TONGUE AND GROOVE SUB-FLOORING ON FLOOR FRAMING.

TYPICAL CONCRETE FLOOR:
 4" MIN. CONC., SLAB JUITI 6X6-741,4X41,4 JUMM. ON 6 MIL., POLY VAPOR BARRIER ON 4" MIN. COMPACTED GRANULAR FILL.

. CRAMINE.
ME 3-2x12 (RADERS WITH 1/2" PLYVOOD UNLESS WOTED OTHERWISE, AS IN GENERAL NOTES
SECTIONS V. C-3, ALL. OTHER FRAMINS SHALL MEET REQUIREMENTS AS STATED IN GENERAL
NOTES SECTION V. CARPENITY. TISSE MANIPACTURER TO SIZE MEMBERS, PASTERSA, AND
SPACING OF ALL TRUSSES FOR INDICATED DESIGN LOADS, MAX. SPACING-24" O.C.)


5. SIZULIRALL. THEER PLANS THREALLY ARE DESIGNED AND STRUCTURED TO MEET 2021 LRC, (MN) REQUIREMENTS. ALL PLANS SHOULD BE VERIFIED BY A LOCAL REGISTERED ENGINEER TO MEET ALL LOCAL BUILDING COOR REQUIREMENTS.

Important:


Contractor/Builders shall verify all conditions and dimensions before beginning construction. Any discrepancies shall be reported to LifeStyle Design Service for justification and/or corrections before proceeding with work. Contractor/Builders shall assume responsibility for all errors that are not reported. (888) 266-3439



Door & window sizes noted in foot & inches. Example: 3050 = 3'-0" x 5'-0"

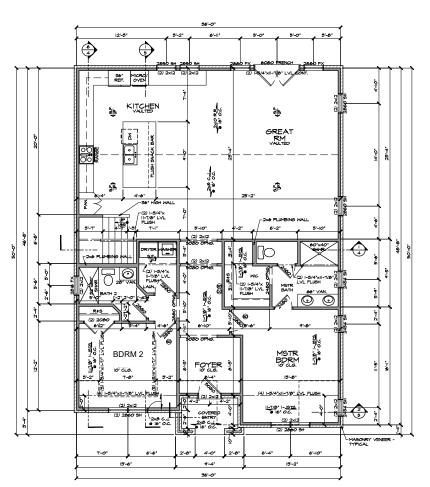

MAIN LEVEL FLOOR PLAN

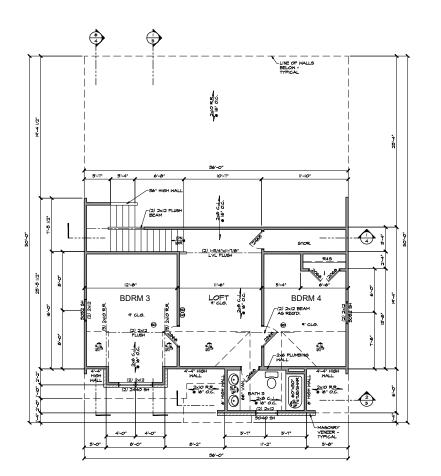

UPPER LEVEL FLOOR PLAN

These plans were originally designed by lome Pattern

Market z 444

2023-245

2