

REPLAT OF CITY BLOCK 1019 LOT- E & FA

ESTABLISHING LOT E-R1 AND E-R2 AND BEING A REMAINDER OF LOT E (TRACT 1) NCB1019, AND ALL OF A 0.121 OF AN ACRE TRACT OF LAND (TRACT 2) NCB1019, CITY OF NEW BRAUNFELS AS CONVEYED IN DOCUMENT NO. 202506003839 OF THE OFFICIAL PUBLIC RECORDS OF COMAL COUNTY TEXAS, AND DESCRIBED IN DOCUMENT NO. 201706047706 OF THE OFFICIAL PUBLIC RECORDS OF COMAL COUNTY TEXAS.

STATE OF TEXAS
COUNTY OF COMAL

I, THE UNDERSIGNED OWNER OF THE LAND SHOWN ON THIS PLAT, AND DESIGNATED HEREIN AS THE REPLAT OF CITY BLOCK 1019 LOT E & FA TO THE CITY OF NEW BRAUNFELS, COUNTY OF COMAL, TEXAS, AND WHOSE NAME IS SUBSCRIBED HERETO, DO HEREBY SUBDIVIDE SUCH PROPERTY AND DEDICATE TO THE USE OF THE PUBLIC ALL STREETS, ALLEYS, PARKS, DRAINS, EASEMENTS, AND PUBLIC PLACES THEREON SHOWN FOR THE PURPOSES AND CONSIDERATION THEREIN EXPRESSED.

OWNER:
RICHARD HILLYER
393 GUADA COMA
NEW BRAUNFELS, TX 78130

STATE OF TEXAS
COUNTY OF COMAL

THIS INSTRUMENT WAS ACKNOWLEDGED BEFORE ME ON THIS ____DAY OF _____, 20____

BY _____

NOTARY PUBLIC, STATE OF TEXAS
MY COMMISSION EXPIRES: _____

STATE OF TEXAS
COUNTY OF COMAL

I, THE UNDERSIGNED OWNER OF THE LAND SHOWN ON THIS PLAT, AND DESIGNATED HEREIN AS THE REPLAT OF CITY BLOCK 1019 LOT E & FA TO THE CITY OF NEW BRAUNFELS, COUNTY OF COMAL, TEXAS, AND WHOSE NAME IS SUBSCRIBED HERETO, DO HEREBY SUBDIVIDE SUCH PROPERTY AND DEDICATE TO THE USE OF THE PUBLIC ALL STREETS, ALLEYS, PARKS, DRAINS, EASEMENTS, AND PUBLIC PLACES THEREON SHOWN FOR THE PURPOSES AND CONSIDERATION THEREIN EXPRESSED.

OWNER:
DONNA A JOHNSON
BOX 909
ABILENE, TX 79604

STATE OF TEXAS
COUNTY OF COMAL

THIS INSTRUMENT WAS ACKNOWLEDGED BEFORE ME ON THIS ____DAY OF _____, 20____

BY _____

NOTARY PUBLIC, STATE OF TEXAS
MY COMMISSION EXPIRES: _____

KNOW ALL MEN BY THESE PRESENTS:

I, THE UNDERSIGNED, DREW A. MAWYER, A REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF TEXAS, HEREBY CERTIFY THAT THIS PLAT IS TRUE AND CORRECTLY MADE UNDER MY SUPERVISION AND IN COMPLIANCE WITH CITY AND STATE SURVEY REGULATIONS AND LAWS AND MADE ON THE GROUND AND THAT THE CORNER MONUMENTS WERE PROPERLY PLACED UNDER MY SUPERVISION.

DREW A. MAWYER
REGISTERED PROFESSIONAL LAND SURVEYOR NO. 5348
D.A. MAWYER LAND SURVEYING, INC.
5151 W. SH46
NEW BRAUNFELS, TEXAS 78132
FIRM #10191500



LEGEND:
R.O.W. = RIGHT-OF-WAY
OPRCCT = OFFICIAL PUBLIC RECORDS OF COMAL COUNTY, TEXAS
O = 1/2" IRON PIN SET WITH CAP STAMPED "DAM #5348 PROP. COR."
• = IRON PIN FOUND


2021 W SH46, STE 105
NEW BRAUNFELS, TX. 78132
PH: 830-358-7127 ink-civil.com
TBPE FIRM F-13351

NOTES:

- ALL LOTS WITHIN THE SUBDIVISION WILL BE PROVIDED WATER, SEWER, AND ELECTRIC SERVICE BY NEW BRAUNFELS UTILITIES.
- THE SUBDIVISION IS WITHIN THE NEW BRAUNFELS INDEPENDENT SCHOOL DISTRICT.
- ALL BEARINGS AND COORDINATES SHOWN HEREON ARE IN GRID BASED ON THE TEXAS STATE PLANE COORDINATE SYSTEM, TEXAS SOUTH CENTRAL ZONE (4204), NORTH AMERICAN DATUM 1983. DISTANCES SHOWN HEREON ARE SURFACE USING COMBINED SCALE FACTOR OF 1.00015.
- MONUMENTS WERE FOUND OR SET AT EACH CORNER OF THE SURVEY BOUNDARY OF THE SUBDIVISION. MONUMENTS AND MARKERS WILL BE SET WITH 1/2" IRON PIN WITH PLASTIC CAP STAMPED "DAM #5348 PROP. COR." IMMEDIATELY AFTER COMPLETION OF UTILITY INSTALLATION AND STREET CONSTRUCTION UNLESS NOTED OTHERWISE.
- CITY BLOCK 1019 LOT E & FA, DOES FALL WITHIN THE CITY LIMITS OF THE CITY OF NEW BRAUNFELS.
- THE PROPOSED USE OF THE SUBDIVISION IS FOR SINGLE FAMILY RESIDENTIAL.
- CITY BLOCK 1019 LOT E & FA, ESTABLISHING A TOTAL OF 2 LOTS, WITH 2 BEING BUILDABLE.
- THIS SUBDIVISION IS SUBJECT TO THE 2018 CITY OF NEW BRAUNFELS PARK LAND DEDICATION AND DEVELOPMENT ORDINANCE. THIS PLAT IS APPROVED FOR 1 DWELLING UNIT PER BUILDABLE LOT WITH A MAXIMUM OF 2 BUILDABLE LOTS. AT SUCH TIME THAT ADDITIONAL DWELLING UNITS ARE CONSTRUCTED; THE OWNER OF THE LOT SHALL CONTACT THE CITY AND COMPLY WITH THE ORDINANCE FOR EACH DWELLING UNIT.
- NO STRUCTURES, WALLS OR OTHER OBSTRUCTIONS OF ANY KIND SHALL BE PLACED WITHIN THE LIMITS OF THE DRAINAGE EASEMENTS SHOWN ON THIS PLAT, NO LANDSCAPING, FENCES, OR OTHER TYPE OF MODIFICATIONS WHICH ALTER THE CROSS SECTIONS OF THE DRAINAGE EASEMENTS OR DECREASES THE HYDRAULIC CAPACITY OF THE EASEMENT, AS APPROVED, SHALL BE ALLOWED WITHOUT THE APPROVAL OF THE CITY ENGINEER. THE CITY OF NEW BRAUNFELS AND GUADALUPE COUNTY SHALL HAVE THE RIGHT OF INGRESS AND EGRESS OVER GRANTORS ADJACENT PROPERTY TO REMOVE ANY OBSTRUCTIONS PLACED WITHIN THE LIMITS OF SAID DRAINAGE EASEMENTS AND TO MAKE ANY MODIFICATIONS OR IMPROVEMENTS WITHIN SAID DRAINAGE EASEMENTS.
- THE ELEVATION OF THE LOWEST FLOOR SHALL BE AT LEAST 10 INCHES ABOVE THE FINISHED GRADE OF THE SURROUNDING GROUND, WHICH SHALL BE SLOPED IN A FASHION SO AS TO DIRECT STORMWATER AWAY FROM THE STRUCTURE. PROPERTIES ADJACENT TO STORMWATER CONVEYANCE STRUCTURES MUST HAVE A FLOOR SLAB ELEVATION OR BOTTOM OF FLOOR JOISTS A MINIMUM OF ONE FOOT ABOVE THE 100-YEAR WATER FLOW ELEVATION IN THE STRUCTURE. DRIVEWAYS SERVING HOUSES ON THE DOWNHILL SIDE OF THE STREET SHALL HAVE A PROPERLY SIZED CROSS SWALE PREVENTING RUNOFF FROM ENTERING THE GARAGE AND SHALL PREVENT WATER FROM LEAVING THE STREET.
- NO STRUCTURES IN THIS SUBDIVISION SHALL BE OCCUPIED UNTIL CONNECTED TO A PUBLIC WATER AND SEWER SYSTEM WHICH HAS BEEN APPROVED BY NEW BRAUNFELS UTILITIES.
- NO PORTION OF THE SUBDIVISION IS LOCATED WITHIN THE EXISTING SPECIAL FLOOD HAZARD ZONE A, 100-YEAR FLOOD BOUNDARY, AS DEFINED BY THE GUADALUPE COUNTY, TEXAS COMMUNITY PANEL NUMBER 48091C0455G, REVISED MAY 08, 2024 AS PREPARED BY THE FEDERAL EMERGENCY MANAGEMENT AGENCY.
- EACH LOT OWNER SHALL BE RESPONSIBLE FOR VERIFYING THE DEPTH OF THE SEWER SERVICE STUB OUT AND DETERMINING THE MINIMUM SERVICEABLE FINISH FLOOR ELEVATION.
- FUTURE DEVELOPMENT IS SUBJECT TO CHAPTER 114 (STREETS, SIDEWALKS, AND OTHER PUBLIC SPACES) OF THE NEW BRAUNFELS CODE OF ORDINANCES.
- NO PORTION OF THIS PROPERTY IS WITHIN THE EDWARDS AQUIFER RECHARGE ZONE.
- 1' CONTOURS ARE SOURCED FROM THE CITY OF NEW BRAUNFELS LIDAR GIS DATABASE AND ARE BASED ON THE TEXAS STATE PLANE COORDINATE SYSTEM, TEXAS SOUTH CENTRAL ZONE (4204), NORTH AMERICAN DATUM 1988.

NEW BRAUNFELS UTILITIES NOTES:

- MAINTENANCE OF DEDICATED UTILITY EASEMENTS IS THE RESPONSIBILITY OF THE PROPERTY OWNER. ANY USE OF AN EASEMENT, OR ANY PORTION OF IT, INCLUDING LANDSCAPING OR DRAINAGE FEATURES, IS SUBJECT TO AND SHALL NOT CONFLICT WITH THE TERMS AND CONDITIONS IN THE EASEMENT, MUST NOT ENDANGER OR INTERFERE WITH THE RIGHTS GRANTED BY THE EASEMENT TO NEW BRAUNFELS UTILITIES, ITS SUCCESSORS AND ASSIGNS, AND SHALL BE SUBJECT TO APPLICABLE PERMIT REQUIREMENTS OF THE CITY OF NEW BRAUNFELS OR ANY OTHER GOVERNING BODY. THE PROPERTY OWNER MUST OBTAIN, IN ADVANCE, WRITTEN AGREEMENT WITH THE UTILITIES TO UTILIZE THE EASEMENT, OR ANY PART OF IT.
- UTILITIES WILL POSSESS A 5' WIDE SERVICE EASEMENT TO THE BUILDING STRUCTURE ALONG THE SERVICE LINE TO THE SERVICE ENTRANCE. THIS EASEMENT WILL VARY DEPENDING UPON LOCATION OF DWELLING AND SERVICE.
- UTILITIES SHALL HAVE ACCESS TO THE METER LOCATIONS FROM THE FRONT YARD AND METER LOCATIONS SHALL NOT BE LOCATED WITHIN A FENCED AREA.
- EACH LOT MUST HAVE ITS OWN WATER AND SEWER SERVICE AT THE OWNER'S/DEVELOPER'S EXPENSE.
- DO NOT COMBINE ANY NEW UTILITY EASEMENTS (U.E.) WITH DRAINAGE EASEMENTS (D.E.) OR MAKE CHANGES IN GRADE WITHIN THE UTILITY EASEMENTS (U.E.) WITHOUT WRITTEN APPROVAL FROM NEW BRAUNFELS UTILITIES.
- LOT DESIGNATED AS LOT E & FA-R1 WILL ONLY BE SERVED BY NBU UPON COMPLETION OF BOTH NBU-APPROVED WATER AND WASTEWATER SERVICE LATERALS CAPABLE OF CONVEYING THE DEVELOPMENT'S DEMAND BY THE LOT OWNER.

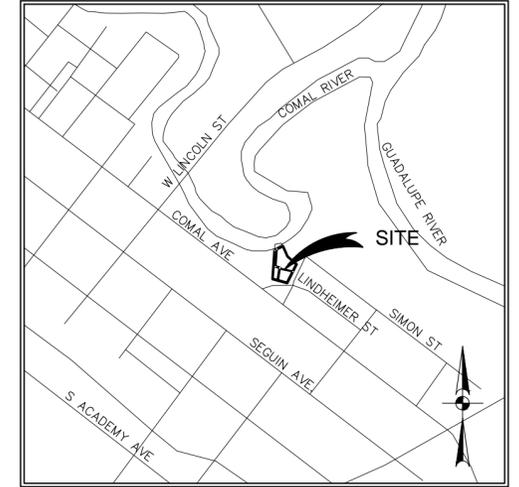

LOCATION MAP
SCALE: 1"=1,000'

APPROVED THIS THE ____ DAY OF _____, 20____ BY THE
PLANNING COMMISSION OF THE CITY OF NEW BRAUNFELS, TEXAS.

CHAIRMAN _____

APPROVED FOR ACCEPTANCE

DATE _____ PLANNING DIRECTOR _____

DATE _____ CITY ENGINEER _____

STATE OF TEXAS
COUNTY OF COMAL


I, _____ DO HEREBY CERTIFY THAT THE FOREGOING INSTRUMENT WAS
FILED FOR RECORD IN THE MAP AND PLAT RECORDS, DOC# _____ OF
COMAL COUNTY ON THE ____ DAY OF _____, 20____, AT _____ M.
WITNESS MY HAND OFFICIAL SEAL, THIS THE ____ DAY OF _____, A.D. 20____.

COUNTY CLERK, COMAL COUNTY, TEXAS


DEPUTY _____

RE-PLAT ESTABLISHING
REPLAT OF CITY BLOCK 1019 LOT - E & FA

ESTABLISHING LOT E-R1 AND E-R2 AND BEING A REMAINDER OF LOT E (TRACT 1) NCB 1019, AND ALL OF A 0.121 OF AN ACRE TRACT OF LAND (TRACT 2) NCB 1019, CITY OF NEW BRAUNFELS AS CONVEYED IN DOCUMENT NO. 202506003839 OF THE OFFICIAL PUBLIC RECORDS OF COMAL COUNTY TEXAS, AND DESCRIBED IN DOCUMENT NO. 201706047706 OF THE OFFICIAL PUBLIC RECORDS OF COMAL COUNTY TEXAS.


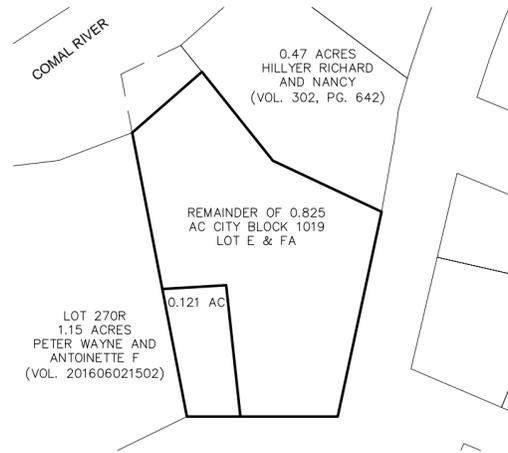


SITE MAP



PURPOSE FOR REPLAT:

THE PURPOSE OF THIS REPLAT IS:
 TO SUBDIVIDE CITY BLOCK 1019 LOT E & A 0.121 ACRE TRACT OF LAND INTO TWO (2) LOTS.

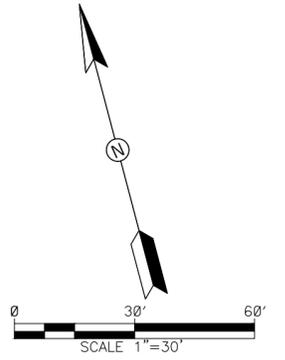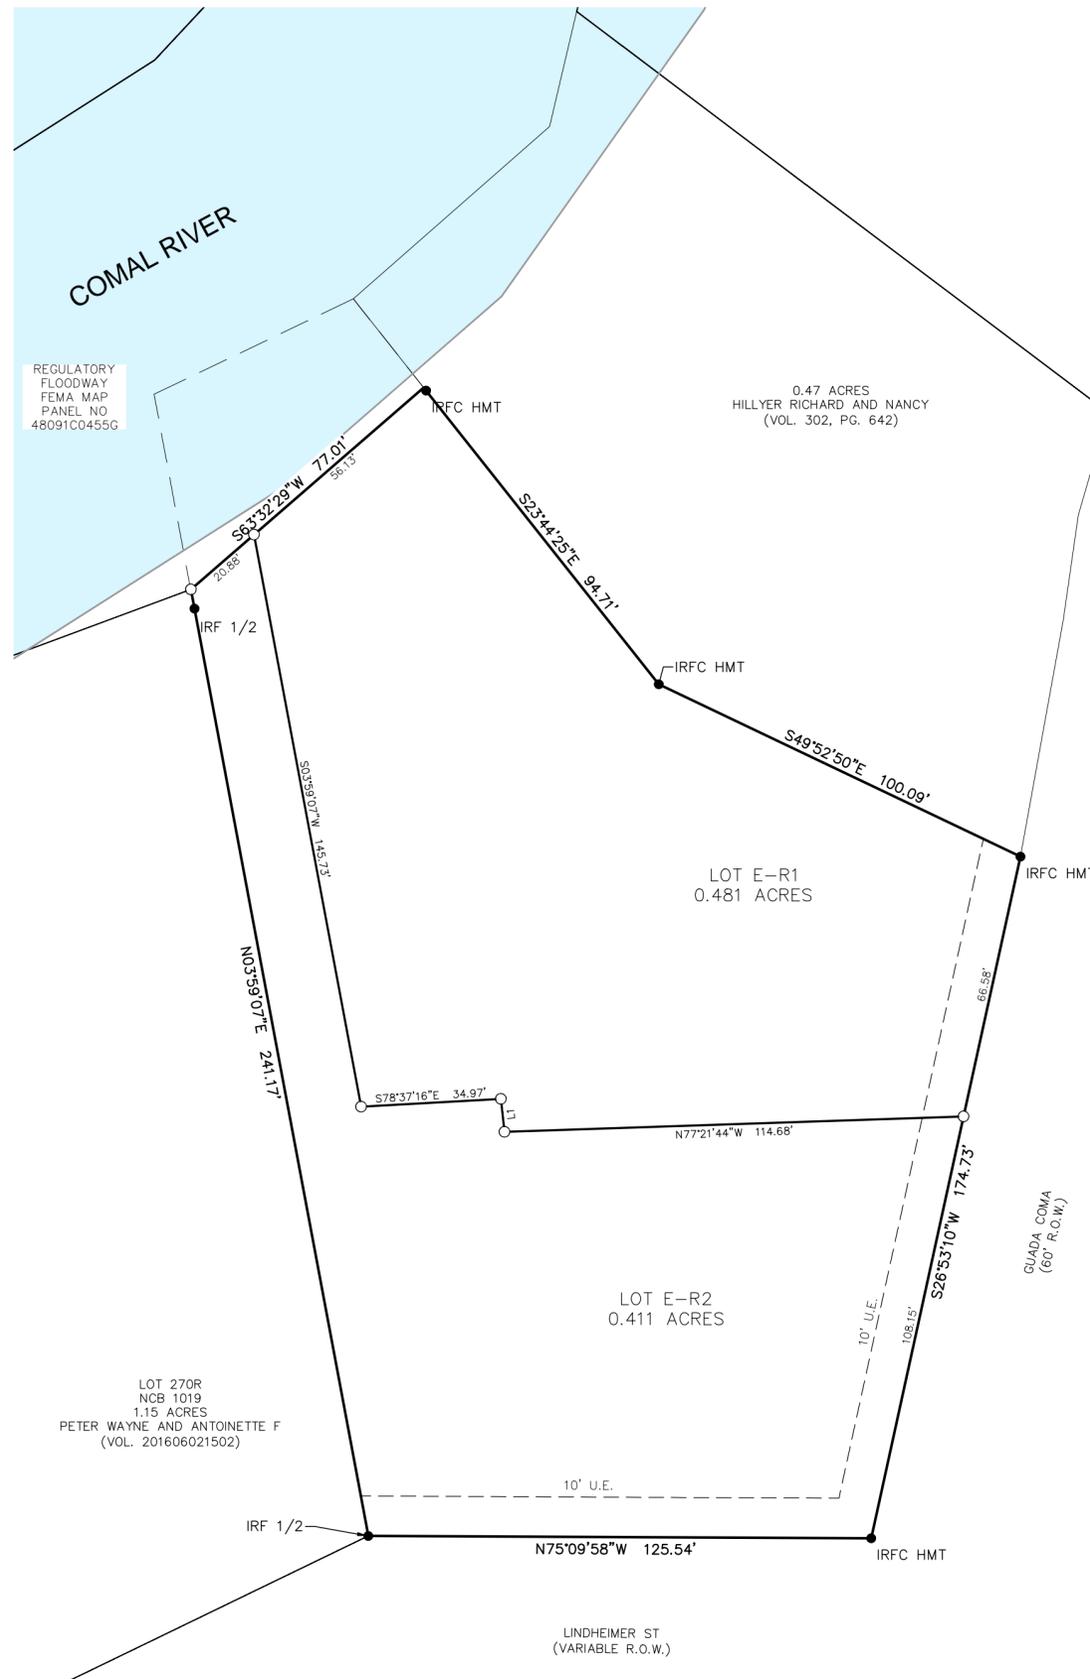

LINE TABLE		
LINE	LENGTH	BEARING
L1	8.30'	S08°37'41"W

- LEGEND:**
- = RIGHT-OF-WAY
 - OPRCCT = OFFICIAL PUBLIC RECORDS OF COMAL COUNTY, TEXAS
 - = 1/2" IRON PIN SET WITH CAP STAMPED "DAM #5348 PROP. COR."
 - = IRON PIN FOUND



2021 W SH46, STE 105
 NEW BRAUNFELS, TX. 78132
 PH: 830-358-7127 ink-civil.com
 TBPE FIRM F-13351

Drawing Name: N:\Projects\HLL001_1019_Lot_E_Replat\Planning\Platting\HLL001_PLAT.dwg User: elijahdatesman Jan 15, 2026 - 4:20pm