

GOODWIN	LANE		KEYSTONE NATIONAL GROUP, LLC			2021380
UNIT TABULATION - 2 STORY BIG HOUSE						10/29/21
UNIT NAME	UNIT TYPE	NET AREA(SF)	UNIT COUNT	PERCENTAGE	TOTAL AREA	% BREAKDOWN
∢I Δ1₋RH	1br/1ba	827	64	20%	52,928	40%
A2-BH	1br/1ba	813	64	20%	52,032	40%
B1-BH	2br/2ba	1,077	64	20%	68,928	40%
B2-BH	2br/2ba	1,412	64	20%	90,368	
C1-BH	3br/2ba	1,447	64	20%	92,608	20%
TOTALS			320	100%	356,864	

\* NET AREA IS COMPUTED TO INCLUDE SQUARE FOOTAGE FROM EXTERIOR FACE OF ALL EXTERIOR FRAME WALLS THAT ENCLOSE A/C SPACE. IT DOES NOT INCLUDE PATIOS, BALCONIES, PATIO/BALCONY STORAGE.

1,115 S.F.

**26.9 GROSS ACRES** 12 UNITS/ACRE

**REQUIRED** 

608 SPACES 691 SPACES

**PROVIDED** 

320 GARAGE SPACES

**GARAGE PARKING** SURFACE PARKING

371 SURFACE SPACES

1,115

2 SPACES/UNIT

## **OWNER'S ACKNOLEGEMENT / STATEMENT**

I, JOSH NEILL, THE APPLICANT AND AGENT ACTING ON BEHALF OF THE OWNER FOR THIS PROJECT AND SUBMITTAL, ACKNOWLEGE THAT THIS SITE PLAN SUBMITTED FOR THE PURPOSES OF REZONING THIS PROPERTY IS IN ACCORDANCE WITH ALL APPLICABLE PROVISIONS OF THE ZONING ORDINANCE. ADDITIONALLY, I UNDERSTAND THAT CITY COUNCIL APPROVAL OF THIS SITE PLAN IN CONJUNCTION WITH A REZONING CASE DOES NOT RELIEVE ME FROM ADHERENCE TO ANY / ALL CITY-ADOPTED CODES / ORDINANCES AT THE TIME OF PLAN SUBMITTAL FOR BUILDING PERMITS. NOR DOES IT RELIEVE ME FROM ADHERENCE TO ANY / ALL STATE OR FEDERAL RULES AND REGULATIONS.


SP04

KEYSTONE NATIONAL GROUP, LLC

ARCHITECTURAL SITEPLAN SCHEME 04

**Development Standards** - Maximum height, minimum area and setback requirements.

- (i) Height. 35 feet or 50 feet when a pitched roof is used (minimum 4:12 pitch).
- (ii) Front building setback. 25 feet.
- (iii) Side building setback. A side building setback of 20 feet shall be provided adjacent to residentially zoned property. A side building setback of only six feet shall be provided adjacent to multifamily, commercially and industrially zoned property.
- (iv) Rear building setback. 25 feet.
- (v) *Residential setback*. Effective November 8, 2006, where a multifamily dwelling abuts a one- or two-family use or zoning district, the setback from the one- or two-family property line shall be at least 20 feet plus one foot for each foot of building height over 20 feet.
- (vi) Accessory uses. Accessory uses such as swimming pools, tennis courts and playgrounds will not be permitted within any required yard.
- (vii) Width of lot. The minimum width of an interior lot shall be 60 feet and the minimum width of a corner lot shall be 70 feet.
- (viii) Density. 12 units per acre.
- (ix) Lot area. 15,000 square feet.
- (x) Lot coverage. The combined area of all yards shall not be less than 50 percent of the total lot or tract; provided however, that in the event enclosed or covered parking is provided, the minimum total yard area requirement shall be 40 percent of the total lot or tract.
- (xi) Distance between structures. There shall be a minimum of 12 feet between structures side by side; a minimum of 30 feet between structures side by front or rear; a minimum of 50 feet between structures front to front; and a minimum of 20 feet between structures backing rear to rear; and a minimum of 20 feet between structures front to rear. The following illustration is a visual depiction of the distances between multifamily structures.

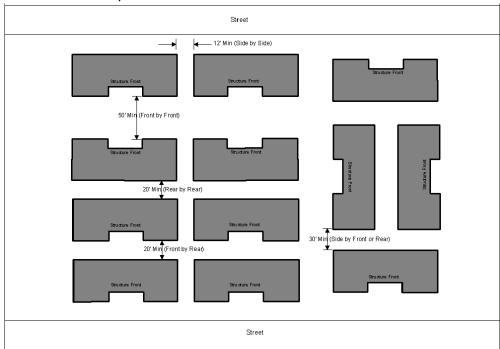

(xii) Lot depth. 100 feet.

(xiii) Parking. Off-street parking spaces shall be provided in accord with the following schedule:

1.One-bedroom apartment or unit: One and one-half spaces.

2.Two-bedroom apartment or unit: Two spaces.

3. Each additional bedroom: One-half space.