

Drawing Name: N:\Projects\Planning\Plating\Unit 2\SCAN008 Highland Gardens Unit 2 PLAT.dwg User: BrittanyBeisert May 04, 2022 - 7:44am

FINAL PLAT ESTABLISHING
HIGHLAND GARDENS SUBDIVISION UNIT 2

BEING 17.056 ACRE OF LAND SITUATED IN THE WILLIAM H PATE SURVEY NO. 22, ABSTRACT NO. 259, GUADALUPE COUNTY, TEXAS AND BEING OUT OF A 38.095 ACRE TRACT OF LAND AS DESCRIBED IN VOLUME 2773, PAGE 98 OF THE OFFICIAL PUBLIC RECORDS OF GUADALUPE COUNTY, TEXAS.

NOTES:

- ALL LOTS WITHIN THE SUBDIVISION WILL BE PROVIDED WATER AND SEWER BY NEW BRAUNFELS UTILITIES. NEW BRAUNFELS UTILITIES SHALL SERVICE ELECTRIC TO BLOCK 1 LOTS 20, 21 AND 22, BLOCK 3 LOT 9, AND BLOCK 5 LOTS 16 AND 17. ALL OTHER LOTS SHALL BE SERVED ELECTRIC BY GREEN VALLEY ELECTRIC COOPERATIVE (GVEC).
- ALL STREETS ARE PROPOSED TO BE OF A LOCAL TYPE FUNCTIONAL CLASSIFICATION WITH 50 FOOT RIGHT-OF-WAYS UNLESS NOTED OTHERWISE. GARLAND WAY IS A MINOR COLLECTOR AND HAS A 60 FOOT RIGHT-OF-WAY.
- SIDEWALK NOTES:
 - FOUR (4) FOOT WIDE SIDEWALKS WILL BE CONSTRUCTED BY THE HOME BUILDER AT THE BACK OF CURB PER CITY STANDARDS AT THE TIME OF BUILDING CONSTRUCTION, UNLESS OTHERWISE NOTED ON THE PLAT, ALONG:
 - STARGAZER, CLOVERLEAF, GARLAND WAY, ARAJIA LN
 - FOUR (4) FOOT WIDE SIDEWALKS WILL BE CONSTRUCTED BY THE DEVELOPER AT THE BACK OF CURB PER CITY STANDARDS AT THE TIME OF SUBDIVISION STREET CONSTRUCTION ALONG:
 - GARLAND WAY - 901, BLOCK 4; LOT 902, BLOCK 6; LOT 902, BLOCK 1
 - STARGAZER - LOT 900 BLOCK 1; LOT 901, BLOCK 4; LOT 901 BLOCK 1
 - CLOVERLEAF - LOT 901 BLOCK 1; LOT 901 BLOCK 4; LOT 903, BLOCK 1; LOT 902, BLOCK 6
- LOT 900 BLOCK 1, LOT 901 BLOCK 1 AND LOT 901 BLOCK 4 ARE DRAINAGE LOTS AND ARE NON-BUILDABLE LOTS. LOT 902 BLOCK 1, LOT 902 BLOCK 6 ARE OPEN SPACE AND ARE NON-BUILDABLE LOTS. THESE LOTS WILL BE OWNED AND MAINTAINED BY THE PROPERTY OWNER'S ASSOCIATION, THEIR SUCCESSOR'S OR ASSIGNS, AND SHALL NOT BE THE RESPONSIBILITY OF THE CITY OF NEW BRAUNFELS OR GUADALUPE COUNTY. LOT 903 BLOCK 1 IS A UTILITY LOT AND IS PROPOSED TO BE USED AS A LIFT STATION AND WILL BE MAINTAINED BY NBU.
- THE SUBDIVISION IS WITHIN THE COMAL INDEPENDENT SCHOOL DISTRICT.
- ALL BEARINGS AND COORDINATES SHOWN HEREON ARE IN GRID BASED ON THE TEXAS STATE PLANE COORDINATE SYSTEM, TEXAS SOUTH CENTRAL ZONE (4204), NORTH AMERICAN DATUM 1983. DISTANCES SHOWN HEREON ARE SURFACE USING COMBINED SCALE FACTOR OF 1.00015.
- MONUMENTS WERE FOUND OR SET AT EACH CORNER OF THE SURVEY BOUNDARY OF THE SUBDIVISION. MONUMENTS AND MARKERS WILL BE SET WITH 1/2" IRON PIN WITH PLASTIC CAP STAMPED "DAM #5348 PROP. COR." IMMEDIATELY AFTER COMPLETION OF UTILITY INSTALLATION AND STREET CONSTRUCTION UNLESS NOTED OTHERWISE.
- HIGHLAND GARDENS SUBDIVISION UNIT 2, DOES FALL WITHIN THE CITY LIMITS OF THE CITY OF NEW BRAUNFELS.
- THE PROPOSED USE OF THE SUBDIVISION IS FOR SINGLE FAMILY RESIDENTIAL.
- HIGHLAND GARDENS SUBDIVISION UNIT 2, ESTABLISHING A TOTAL OF 66 LOTS, WITH 60 BEING BUILDABLE.
- THIS SUBDIVISION IS SUBJECT TO THE 2006 CITY OF NEW BRAUNFELS PARK LAND AND DEDICATION AND DEVELOPMENT ORDINANCE. THIS PLAT IS APPROVED FOR ONE DWELLING UNIT PER BUILDABLE LOT WITH A MAXIMUM OF 60 BUILDABLE LOTS. AT SUCH TIME THAT ADDITIONAL DWELLING UNITS ARE CONSTRUCTED; THE OWNER OF THE LOT SHALL CONTACT THE CITY AND COMPLY WITH THE ORDINANCE FOR EACH DWELLING UNIT.
- NO STRUCTURES, WALLS OR OTHER OBSTRUCTIONS OF ANY KIND SHALL BE PLACED WITHIN THE LIMITS OF THE DRAINAGE EASEMENTS SHOWN ON THIS PLAT, NO LANDSCAPING, FENCES, OR OTHER TYPE OF MODIFICATIONS WHICH ALTER THE CROSS SECTIONS OF THE DRAINAGE EASEMENTS OR DECREASES THE HYDRAULIC CAPACITY OF THE EASEMENT, AS APPROVED, SHALL BE ALLOWED WITHOUT THE APPROVAL OF THE CITY ENGINEER. THE CITY OF NEW BRAUNFELS AND GUADALUPE COUNTY SHALL HAVE THE RIGHT OF INGRESS AND EGRESS OVER GRANTORS' ADJACENT PROPERTY TO REMOVE ANY OBSTRUCTIONS PLACED WITHIN THE LIMITS OF SAID DRAINAGE EASEMENTS AND TO MAKE ANY MODIFICATIONS OR IMPROVEMENTS WITHIN SAID DRAINAGE EASEMENTS.
- THE ELEVATION OF THE LOWEST FLOOR SHALL BE AT LEAST 10 INCHES ABOVE THE FINISHED GRADE OF THE SURROUNDING GROUND, WHICH SHALL BE SLOPED IN A FASHION SO AS TO DIRECT STORMWATER AWAY FROM THE STRUCTURE. PROPERTIES ADJACENT TO STORMWATER CONVEYANCE STRUCTURES MUST HAVE A FLOOR SLAB ELEVATION OR BOTTOM OF FLOOR JOISTS A MINIMUM OF ONE FOOT ABOVE THE 100-YEAR WATER FLOW ELEVATION IN THE STRUCTURE. DRIVEWAYS SERVING HOUSES ON THE DOWNHILL SIDE OF THE STREET SHALL HAVE A PROPERLY SIZED CROSS SWALE PREVENTING RUNOFF FROM ENTERING THE GARAGE AND SHALL PREVENT WATER FROM LEAVING THE STREET.
- NO STRUCTURES IN THIS SUBDIVISION SHALL BE OCCUPIED UNTIL CONNECTED TO A PUBLIC WATER AND SEWER SYSTEM WHICH HAS BEEN APPROVED BY NEW BRAUNFELS UTILITIES.
- MAINTENANCE OF DRAINAGE EASEMENT DESIGNATED WITHIN A LOT SHALL BE THE RESPONSIBILITY OF THE PROPERTY OWNERS ASSOCIATION.
- NO PORTION OF THE SUBDIVISION IS LOCATED WITHIN THE EXISTING SPECIAL FLOOD HAZARD ZONE A, 100-YEAR FLOOD BOUNDARY, AS DEFINED BY THE GUADALUPE COUNTY, TEXAS COMMUNITY PANEL NUMBER 48187C0095F, REVISED NOVEMBER 02, 2007 AS PREPARED BY THE FEDERAL EMERGENCY MANAGEMENT AGENCY.
- EACH LOT OWNER SHALL BE RESPONSIBLE FOR VERIFYING THE DEPTH OF THE SEWER SERVICE STUB OUT AND DETERMINING THE MINIMUM SERVICEABLE FINISH FLOOR ELEVATION.
- FUTURE DEVELOPMENT IS SUBJECT TO CHAPTER 114 (STREETS, SIDEWALKS, AND OTHER PUBLIC SPACES) OF THE NEW BRAUNFELS CODE OF ORDINANCES.
- NO PORTION OF THIS PROPERTY IS WITHIN THE EDWARDS AQUIFER RECHARGE ZONE.
- PERMANENT WATER QUALITY CONTROLS ARE REQUIRED FOR THIS SUBDIVISION PLAT IN

ACCORDANCE WITH THE CITY OF NEW BRAUNFELS DRAINAGE AND EROSION CONTROL DESIGN MANUAL.

- 5' CONTOURS ARE SOURCED FROM THE CITY OF NEW BRAUNFELS LIDAR GIS DATABASE AND ARE BASED ON THE TEXAS STATE PLANE COORDINATE SYSTEM, TEXAS SOUTH CENTRAL ZONE (4204), NORTH AMERICAN DATUM 1988.
- ALL RESIDENTIAL LOTS MEET THE MINIMUM SQUARE FOOTAGE AS DEFINED IN THE HIGHLAND GARDENS PLANNED DEVELOPMENT DISTRICT STANDARDS.

NEW BRAUNFELS UTILITIES NOTES:


- MAINTENANCE OF DEDICATED UTILITY EASEMENTS IS THE RESPONSIBILITY OF THE PROPERTY OWNER. ANY USE OF AN EASEMENT, OR ANY PORTION OF IT, INCLUDING LANDSCAPING OR DRAINAGE FEATURES, IS SUBJECT TO AND SHALL NOT CONFLICT WITH THE TERMS AND CONDITIONS IN THE EASEMENT, MUST NOT ENDANGER OR INTERFERE WITH THE RIGHTS GRANTED BY THE EASEMENT TO NEW BRAUNFELS UTILITIES, ITS SUCCESSORS AND ASSIGNS, AND SHALL BE SUBJECT TO APPLICABLE PERMIT REQUIREMENTS OF THE CITY OF NEW BRAUNFELS OR ANY OTHER GOVERNING BODY. THE PROPERTY OWNER MUST OBTAIN, IN ADVANCE, WRITTEN AGREEMENT WITH THE UTILITIES TO UTILIZE THE EASEMENT, OR ANY PART OF IT.
- UTILITIES WILL POSSESS A 5' WIDE SERVICE EASEMENT TO THE BUILDING STRUCTURE ALONG THE SERVICE LINE TO THE SERVICE ENTRANCE. THIS EASEMENT WILL VARY DEPENDING UPON LOCATION OF DWELLING AND SERVICE.
- UTILITIES SHALL HAVE ACCESS TO THE METER LOCATIONS FROM THE FRONT YARD AND METER LOCATIONS SHALL NOT BE LOCATED WITHIN A FENCED AREA.
- EACH LOT MUST HAVE ITS OWN WATER AND SEWER SERVICE AT THE OWNER'S/DEVELOPER'S EXPENSE.
- DO NOT COMBINE ANY NEW UTILITY EASEMENTS (U.E.) WITH DRAINAGE EASEMENTS (D.E.) OR MAKE CHANGES IN GRADE WITHIN THE UTILITY EASEMENTS (U.E.) WITHOUT WRITTEN APPROVAL FROM NEW BRAUNFELS UTILITIES.

GUADALUPE VALLEY ELECTRIC COOPERATIVE NOTES:

- GVEC TO HAVE A 5' WIDE EASEMENT ON ALL ROAD CROSSINGS IN WHICH ELECTRIC OR COMMUNICATION LINES ARE LOCATED.
- GVEC WILL POSSESS A 5-FOOT WIDE EASEMENT TO THE SERVICE METER LOCATION. EASEMENT TO FOLLOW SERVICE LINE AND WILL VARY DEPENDING ON LOCATION OF BUILDING OR STRUCTURE.
- GVEC SHALL HAVE ACCESS TO METER LOCATIONS FROM THE FRONT YARD WITH THE LOCATION NOT BEING WITHIN A FENCED AREA.
- ALL UTILITY EASEMENTS ARE FOR THE CONSTRUCTION, MAINTENANCE (INCLUDING BUT NOT LIMITED TO REMOVAL OF TREES AND OTHER OBSTRUCTIONS), READING OF METERS, AND REPAIR OF ALL OVERHEAD AND UNDERGROUND UTILITIES.

TXDOT NOTES:

- FOR RESIDENTIAL DEVELOPMENT DIRECTLY ADJACENT TO STATE RIGHT-OF-WAY, THE DEVELOPER SHALL BE RESPONSIBLE FOR ADEQUATE SETBACK AND/OR SOUND ABATEMENT MEASURES FOR FUTURE NOISE MITIGATION.
- OWNER/DEVELOPER IS RESPONSIBLE FOR PREVENTING ANY ADVERSE IMPACT TO THE EXISTING DRAINAGE SYSTEM WITHIN THE HIGHWAY RIGHT-OF-WAY.
- MAXIMUM ACCESS POINTS TO STATE HIGHWAY FROM THIS PROPERTY WILL BE REGULATED AS DIRECTED BY TXDOT'S, "ACCESS MANAGEMENT MANUAL". THE PROPERTY IS ELIGIBLE FOR MAXIMUM COMBINED TOTAL OF 1 (ONE) ACCESS POINT, BASED ON AN OVERALL PLATTED HIGHWAY FRONTAGE OF APPROXIMATELY 292.77 FEET. WHERE TOPOGRAPHY OR OTHER EXISTING CONDITIONS MAKE IT INAPPROPRIATE OR NOT FEASIBLE TO CONFORM TO THE CONNECTION SPACING INTERVALS, THE LOCATION OF REASONABLE ACCESS WILL BE DETERMINED WITH CONSIDERATION GIVEN TO TOPOGRAPHY, ESTABLISHED PROPERTY OWNERSHIPS, UNIQUE PHYSICAL LIMITATIONS, AND/OR PHYSICAL DESIGN CONSTRAINTS. THE SELECTED LOCATION SHOULD SERVE AS MANY PROPERTIES AND INTERESTS AS POSSIBLE TO REDUCE THE NEED FOR ADDITIONAL DIRECT ACCESS TO THE HIGHWAY. IN SELECTING LOCATIONS FOR FULL MOVEMENT INTERSECTIONS, PREFERENCE WILL BE GIVEN TO PUBLIC ROADWAYS THAT ARE ON LOCAL THOROUGHFARE PLANS.
- IF SIDEWALKS ARE REQUIRED BY APPROPRIATE CITY ORDINANCE, A SIDEWALK PERMIT MUST BE APPROVED BY TXDOT, PRIOR TO CONSTRUCTION WITHIN STATE RIGHT-OF-WAY. LOCATIONS OF SIDEWALKS WITHIN STATE RIGHT-OF-WAY SHALL BE AS DIRECTED BY TXDOT.
- ANY TRAFFIC CONTROL MEASURE (LEFT TURN LANE, RIGHT TURN LANE, SIGNAL, ETC.) FOR ANY ACCESS FRONTING A STATE MAINTAINED ROADWAY SHALL BE THE RESPONSIBILITY OF THE DEVELOPER/OWNER.
-

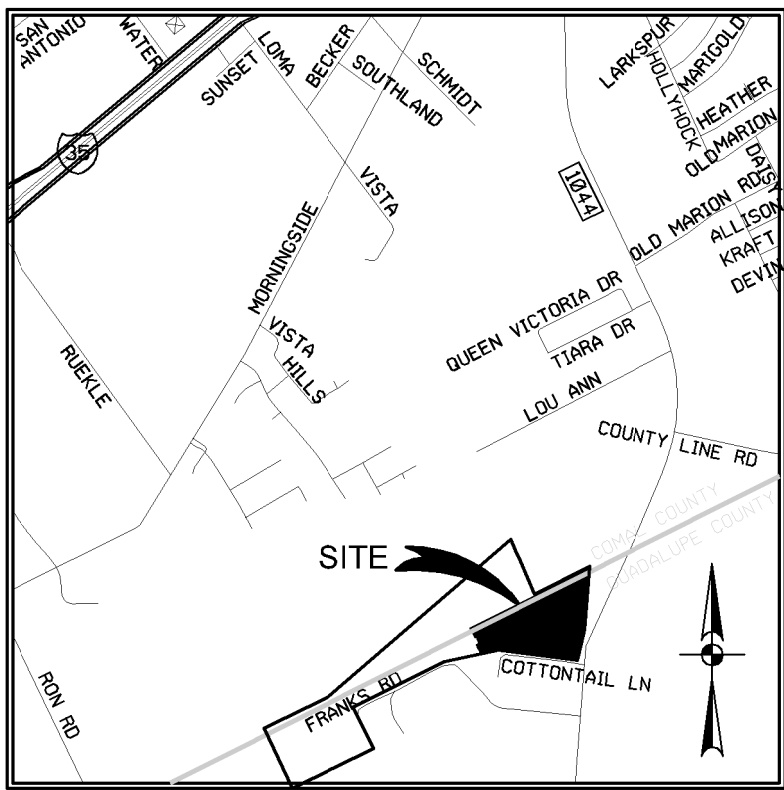


LOCATION MAP

SCALE: 1"=2,000'

NOTE: G.V.E.C. WILL MAINTAIN 5' EASEMENT FOR SERVICE ENTRANCE TO DWELLING. THIS EASEMENT WILL VARY DEPENDING UPON LOCATION OF DWELLING.

G.V.E.C. SHALL HAVE ACCESS TO THE METER LOCATIONS FROM THE FRONT YARDS WITH THE METER LOCATIONS NOT BEING LOCATED WITHIN A FENCED AREA.

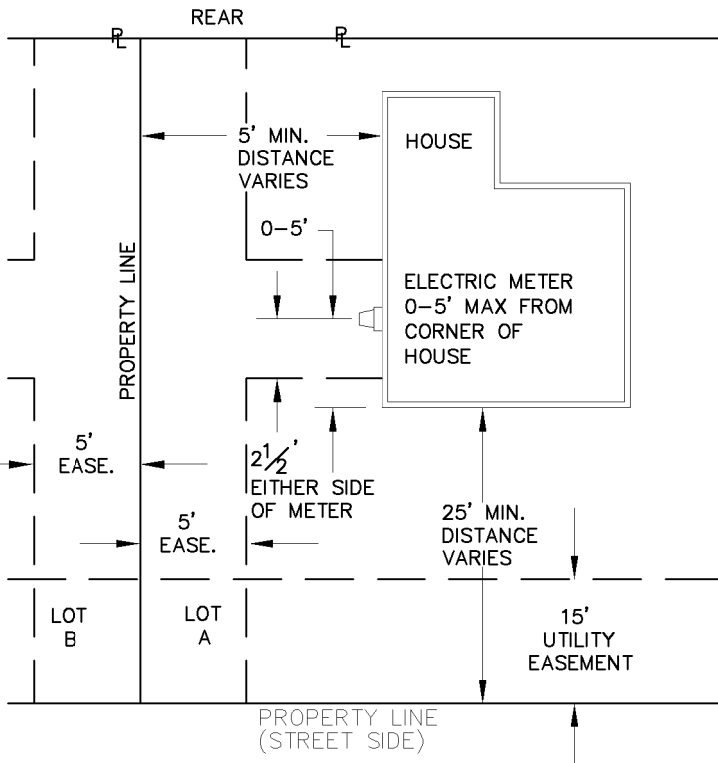

TYPICAL EASEMENT ON INTERIOR PROPERTY LINE

APPROVED THIS THE _____ DAY OF _____, 20____ BY THE PLANNING COMMISSION OF THE CITY OF NEW BRAUNFELS, TEXAS.

CHAIRMAN _____

APPROVED FOR ACCEPTANCE

DATE _____ PLANNING DIRECTOR _____

DATE _____ CITY ENGINEER _____

DATE _____ NEW BRAUNFELS UTILITIES _____

STATE OF TEXAS
COUNTY OF GUADALUPE

I, _____ COUNTY CLERK OF SAID COUNTY, DO HEREBY CERTIFY THAT THE FOREGOING INSTRUMENT OF WRITING WITH ITS CERTIFICATE OF AUTHENTICATION WAS FILED FOR RECORD IN MY OFFICE, ON THE _____ DAY OF _____, A.D. 20____ AT _____ M. AND DULY RECORDED THE _____ DAY OF _____, A.D. 20____ AT _____ M. IN THE MAP AND PLAT RECORDS OF GUADALUPE COUNTY, TEXAS IN VOLUME _____ PAGE _____ IN TESTIMONY WHEREOF, WITNESS MY HAND AND OFFICIAL SEAL OF OFFICE, THIS THE _____ DAY OF _____, A.D. 20____

COUNTY CLERK, GUADALUPE COUNTY, TEXAS

DEPUTY _____

STATE OF TEXAS
COUNTY OF GUADALUPE

"I, THE UNDERSIGNED OWNER OF THE LAND SHOWN ON THIS PLAT, AND DESIGNATED HEREIN AS THE HIGHLAND GARDENS SUBDIVISION UNIT 2 SUBDIVISION TO THE CITY OF NEW BRAUNFELS, COUNTY OF GUADALUPE, TEXAS, AND WHOSE NAME IS SUBSCRIBED HERETO, DO HEREBY SUBDIVIDE SUCH PROPERTY AND DEDICATE TO THE USE OF THE PUBLIC ALL STREETS, DRAINS, EASEMENTS, AND PUBLIC PLACES THEREON SHOWN FOR THE PURPOSES AND CONSIDERATION THEREIN EXPRESSED."

OWNER:
SA HIGHLAND GARDENS, LTD., A TEXAS LIMITED PARTNERSHIP
BY: CAMCORP MANAGEMENT, INC., A TEXAS CORPORATION
ITS GENERAL PARTNER:
TIM PRUSKI, AUTHORIZED AGENT
2714 N LOOP 11604 E, SUITE #101
SAN ANTONIO, TX 78232

STATE OF TEXAS
COUNTY OF COMAL

THIS INSTRUMENT WAS ACKNOWLEDGED BEFORE ME ON THIS ____DAY OF _____, 20____

BY _____

NOTARY PUBLIC, STATE OF TEXAS
MY COMMISSION EXPIRES: _____

KNOW ALL MEN BY THESE PRESENTS:

I, THE UNDERSIGNED, DREW A. MAWYER, A REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF TEXAS, HEREBY CERTIFY THAT THIS PLAT IS TRUE AND CORRECTLY MADE UNDER MY SUPERVISION AND IN COMPLIANCE WITH CITY AND STATE SURVEY REGULATIONS AND LAWS AND MADE ON THE GROUND AND THAT THE CORNER MONUMENTS WERE PROPERLY PLACED UNDER MY SUPERVISION.

DREW A. MAWYER
REGISTERED PROFESSIONAL LAND SURVEYOR NO. 5348
D.A. MAWYER LAND SURVEYING, INC.
5151 W. SH46
NEW BRAUNFELS, TEXAS 78132
FIRM #10191500



- LEGEND:
- P.O.B. = POINT OF BEGINNING
 - B.L. = BUILDING SETBACK LINE
 - D.L. = DRAINAGE LOT
 - U.E. = UTILITY EASEMENT
 - R.O.W. = RIGHT-OF-WAY
 - O.S. = OPEN SPACE LOT
 - PAGE MATCH LINE
 - 1/2" IRON PIN SET
 - IRON PIN FOUND
 - TXDOT MONUMENT FOUND



2021 W SH46, STE 105
NEW BRAUNFELS, TX. 78132
PH: 830-358-7127 ink-civil.com
TBPE FIRM F-13351

Drawing Name: N:\Projects\GEN001 Highland Gardens Unit 2\SCAND08 Highland Gardens Unit 2 PLAT.dwg User: BrittanyBeisert May 03, 2022 - 10:21am

FINAL PLAT ESTABLISHING
HIGHLAND GARDENS SUBDIVISION UNIT 2

BEING 17.056 ACRE OF LAND SITUATED IN THE WILLIAM H PATE SURVEY NO. 22, ABSTRACT NO. 259, GUADALUPE COUNTY, TEXAS AND BEING OUT OF A 38.095 ACRE TRACT OF LAND AS DESCRIBED IN VOLUME 2773, PAGE 98 OF THE OFFICIAL PUBLIC RECORDS OF GUADALUPE COUNTY, TEXAS.

CURVE TABLE					
CURVE	LENGTH	RADIUS	DELTA	TANGENT	CHORD LENGTH
C1	292.77'	2332.00'	7°11'36"	146.58'	292.58'
C2	21.57'	13.00'	95°03'22"	14.20'	19.18'
C3	19.27'	13.00'	84°56'38"	11.90'	17.56'
C4	42.36'	480.00'	5°03'22"	21.19'	42.34'
C6	20.42'	13.00'	90°00'00"	13.00'	18.38'
C7	19.58'	13.00'	86°17'16"	12.18'	17.78'
C8	239.22'	540.00'	25°22'57"	121.61'	237.27'
C9	19.11'	13.00'	84°12'43"	11.75'	17.43'
C10	144.30'	150.00'	55°07'01"	78.28'	138.80'
C11	276.08'	58.00'	27°24'37"	55.30'	80.05'
C12	8.09'	5.00'	92°43'46"	5.24'	7.24'
C13	7.85'	5.00'	90°00'00"	5.00'	7.07'
C14	89.42'	150.00'	34°09'16"	46.08'	88.10'
C15	19.27'	13.00'	84°56'38"	11.90'	17.56'
C16	21.57'	13.00'	95°03'22"	14.20'	19.18'
C17	47.65'	540.00'	5°03'22"	23.84'	47.64'
C18	21.05'	13.00'	92°47'06"	13.65'	18.83'
C19	92.61'	100.00'	53°03'38"	49.92'	89.33'
C20	7.85'	5.00'	90°00'00"	5.00'	7.07'
C21	59.61'	100.00'	34°09'16"	30.72'	58.73'
C22	64.35'	2367.00'	1°33'28"	32.18'	64.35'

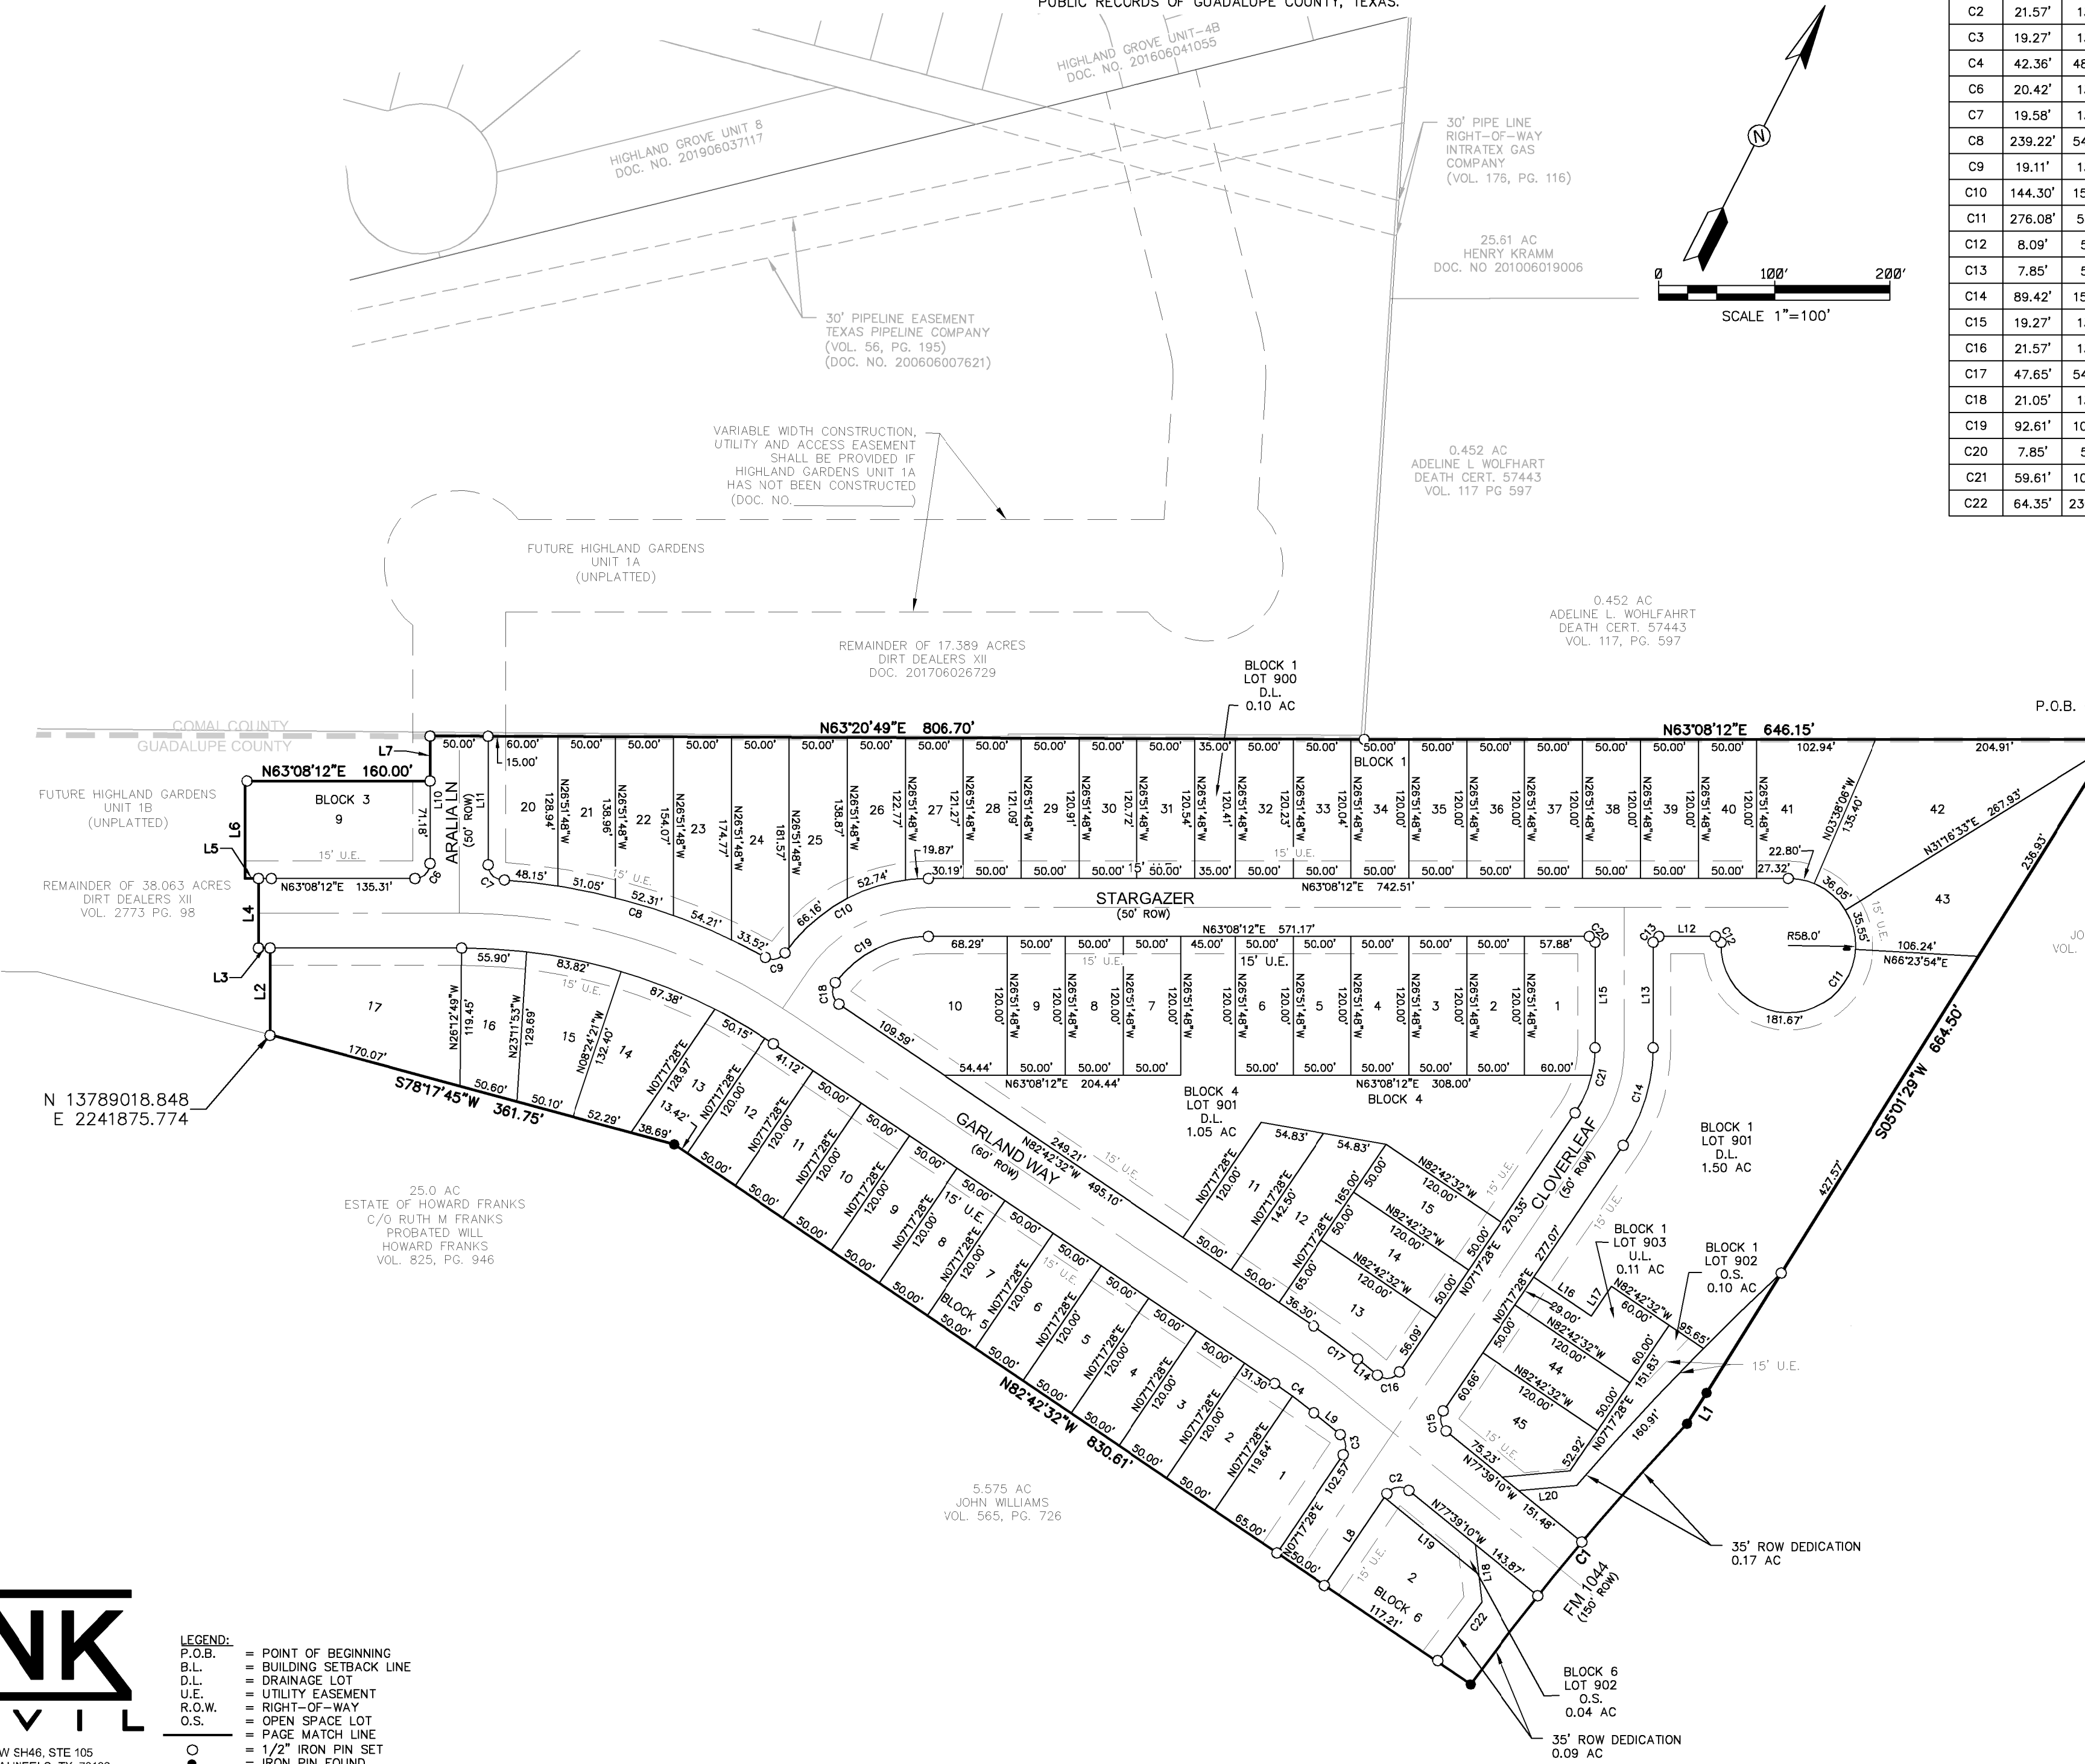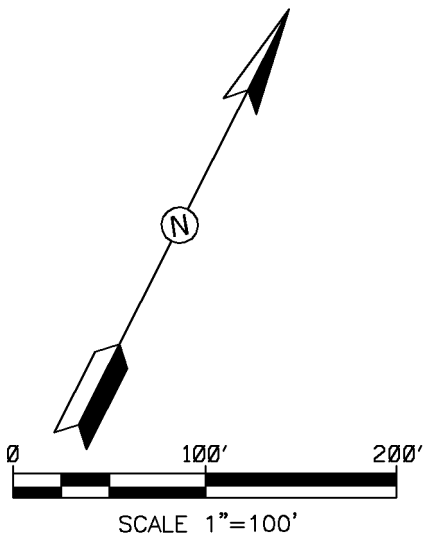

LINE TABLE		
LINE	LENGTH	BEARING
L1	31.40'	S05°16'42"W
L2	74.97'	N26°51'48"W
L3	10.00'	S63°08'12"W
L4	60.00'	N26°51'48"W
L5	11.69'	N63°08'12"E
L6	84.18'	N26°51'48"W
L7	38.79'	N26°51'48"W
L8	95.84'	N07°17'28"E
L9	29.66'	N77°39'10"W
L10	109.96'	N26°51'48"W
L11	110.94'	N26°51'48"W
L12	48.42'	N63°08'12"E
L13	91.19'	N26°51'48"W
L14	22.05'	N77°39'10"W
L15	91.19'	N26°51'48"W
L16	60.00'	N82°42'32"W
L17	31.00'	N07°17'28"E
L18	49.99'	S33°13'40"E
L19	104.84'	N77°39'10"W
L20	49.99'	N57°55'19"E



- LEGEND:
- P.O.B. = POINT OF BEGINNING
 - B.L. = BUILDING SETBACK LINE
 - D.L. = DRAINAGE LOT
 - U.E. = UTILITY EASEMENT
 - R.O.W. = RIGHT-OF-WAY
 - O.S. = OPEN SPACE LOT
 - 1/2" IRON PIN SET
 - IRON PIN FOUND
 - TXDOT MONUMENT FOUND

2021 W SH46, STE 105
NEW BRAUNFELS, TX. 78132
PH: 830-358-7127 ink-civil.com
TBPE FIRM F-13351